


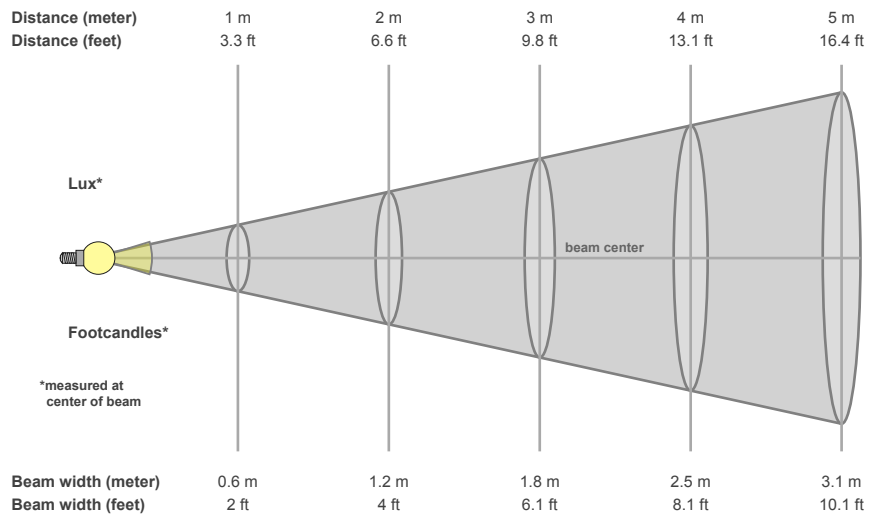


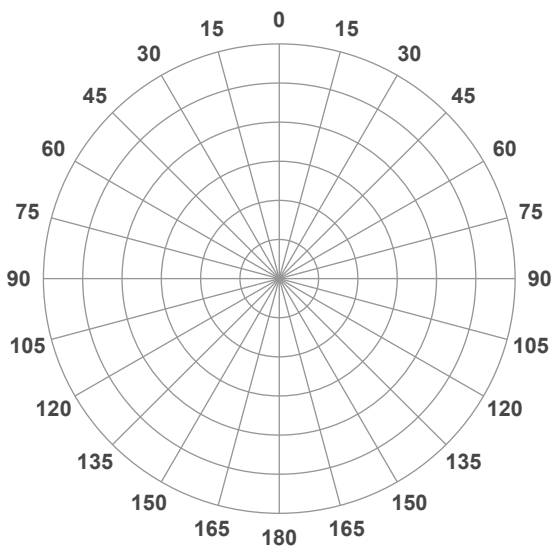


Spectral distribution

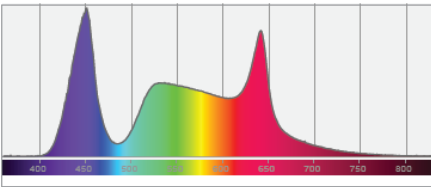


Color coordinates



Zoom color point



CRI R values

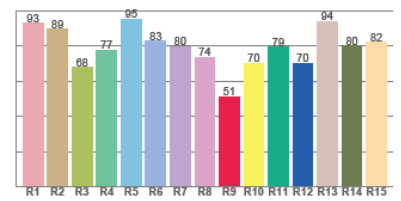

Photometric Test Report

*Due to additional product enhancements, an updated version of this report may be available online. Please check www.adj.com for the latest revision/update of this report.

Hydro Wash X7



Light Efficiency:

5 Lumen/Watt

Light Quality:

CRI: 0.0

Color Temperature:

0 K

Output: 1603 lm

Peak: 126523 cd


Power: 332.4 W

PF: 0.98



Beam Angle

6.7°

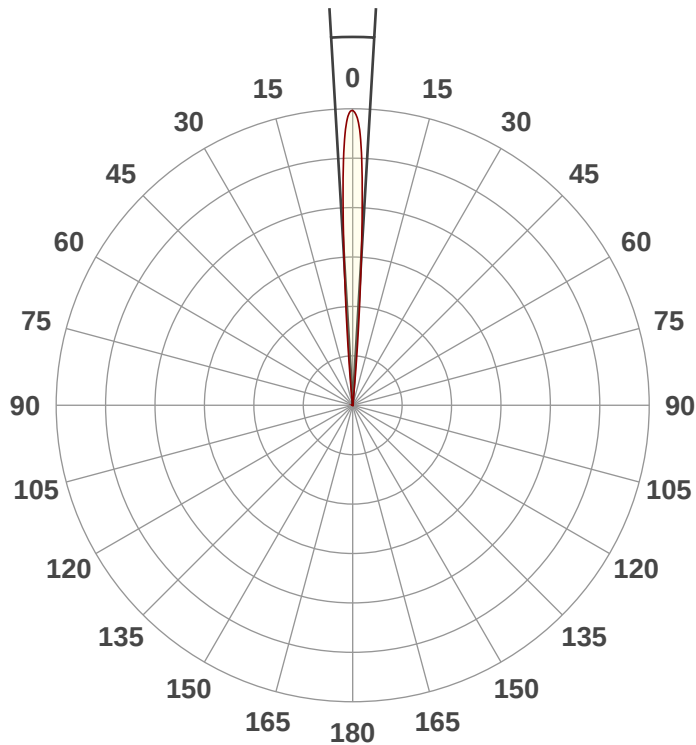

Test:

Zoom In Full On

Date:

10/17/2019


Note:




CIE 1931
x: 0.222
y: 0.164

Spectra



Dominant Wavelength: 458nm

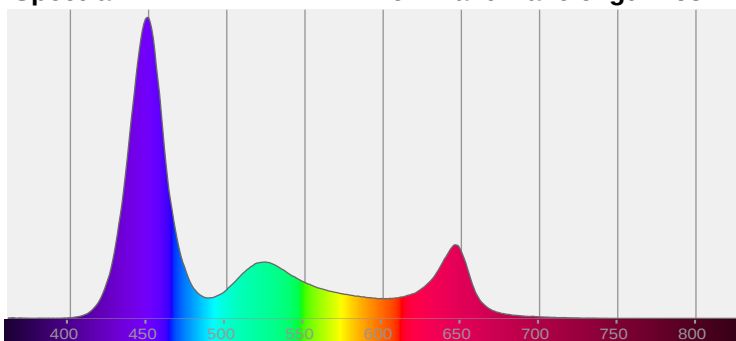

Power

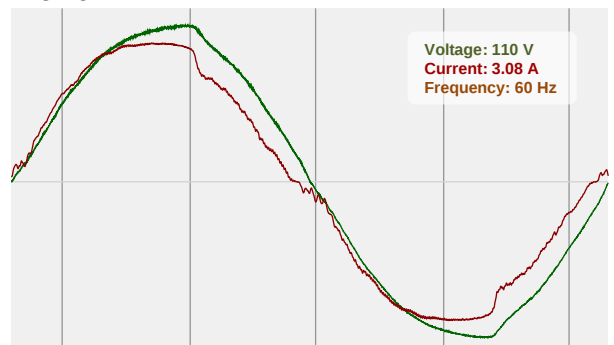


Color Details

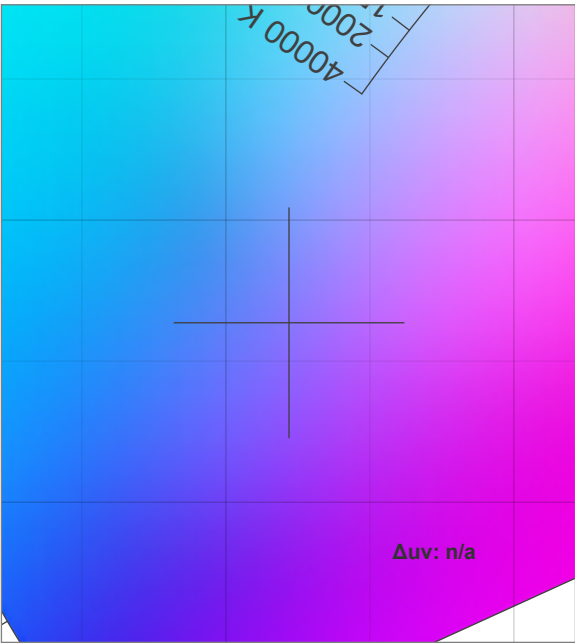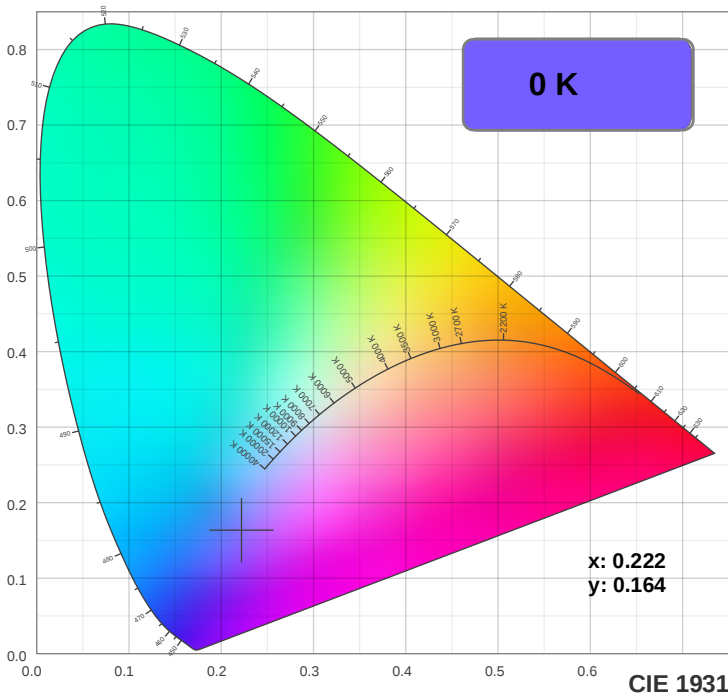


CIE 1931 ZOOM

TM30: 0.0

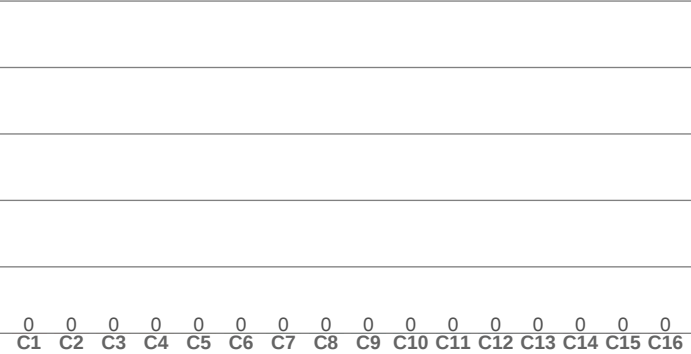

CRI: 0.0 (R1-R8)

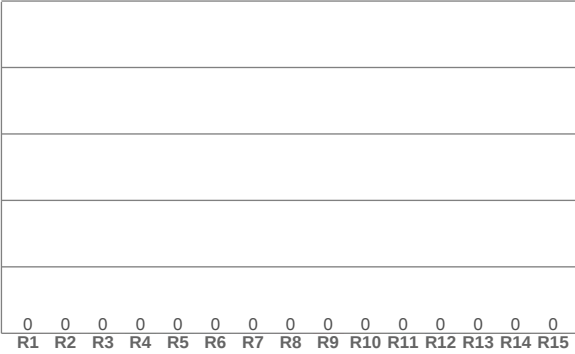

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


CQS: 0.0

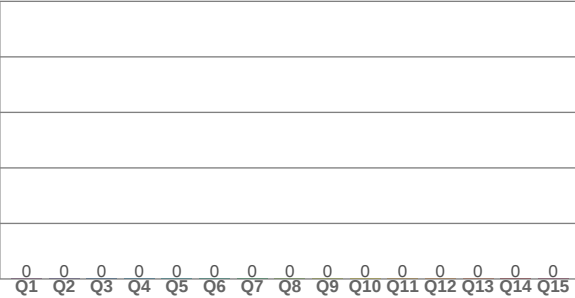

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.222	0.164	0.196	0.217	n/a

Beam Details

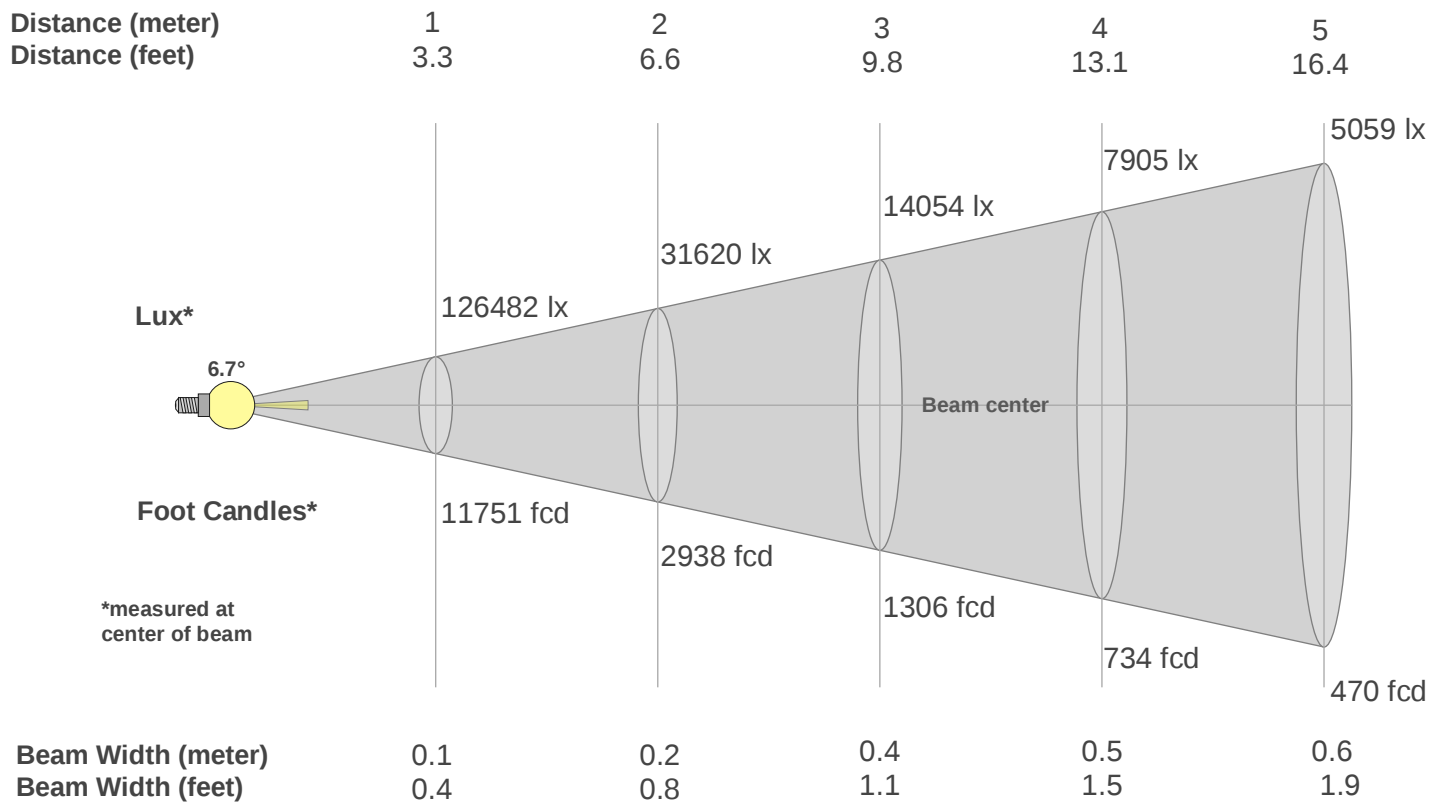

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	126482	31620	14054	7905	5059	3513	2581	1976	1562	1265	1045	878	748	645	562	494	438	390	350	316
fcd	11750.5	2937.6	1305.6	734.4	470	326.4	239.8	183.6	145.1	117.5	97.1	81.6	69.5	60	52.2	45.9	40.7	36.3	32.5	29.4

Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
126K	123K	108K	77K	41K	16K	3K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K
100%	98%	86%	61%	32%	13%	3%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
126K	123K	108K	77K	41K	16K	3K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K
100%	98%	86%	61%	32%	13%	3%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
126K	123K	108K	76K	42K	15K	2K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K
100%	97%	85%	60%	33%	12%	2%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
126K	123K	108K	76K	42K	15K	2K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K	0K
100%	97%	85%	60%	33%	12%	2%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
6.7°	10.3°	11.9°	99.8%	99.8%